



RECORD THIS UNIT INFORMATION FOR
FUTURE REFERENCE:
Model Number _____
Serial Number _____
Date Purchased _____

3309526.006(X)
3309526.014(X)
3309526.154(X)
**CRADLE KIT
FOR
SLIDE TOPPER AWNINGS**

USA
SERVICE OFFICE
Dometic, LLC
2320 Industrial Parkway
Elkhart, IN 46516
574-294-2511

CANADA
Dometic, LLC
46 Zatonski, Unit 3
Brantford, ON N3T 5L8
CANADA
519-720-9578

**For Service Center
Assistance Call:**
800-544-4881

⚠ WARNING

This manual must be read and understood before installation, adjustment, service, or maintenance is performed. This unit must be installed by a qualified service technician. Modification of this product can be extremely hazardous and could result in personal injury or property damage.

⚠ AVERTISSEMENT

Lire et comprendre ce manuel avant de procéder à l'installation, à des réglages, de l'entretien ou des réparations. L'installation de cet appareil doit être effectuée par un réparateur qualifié. Toute modification de cet appareil peut être extrêmement dangereuse et entraîner des blessures ou dommages matériels.

**INSTALLATION & OPERATING
INSTRUCTIONS**

Models

3309526.006(X)
3309526.014(X)
3309526.154(X)
CRADLE KIT


REVISION:
Form No. 3309568.040 1/10
(Replaces 3309568.032)
(French 3309569.048)
©2010 Dometic, LLC
LaGrange, IN 46761

Important: These Instructions must stay with unit. Owner read carefully.

SAFETY INSTRUCTIONS

This manual has safety information and instructions to help users eliminate or reduce the risk of accidents and injuries.

RECOGNIZE SAFETY INFORMATION



This is the safety-alert symbol. When you see this symbol in this manual, be alert to the potential for personal injury.

Follow recommended precautions and safe operating instructions.

UNDERSTAND SIGNAL WORDS

A signal word, **WARNING** OR **CAUTION** is used with the safety-alert symbol. They give the level of risk for potential injury.

⚠ WARNING indicates a potentially hazardous situation which, if not avoided, could result in death or serious injury.

⚠ CAUTION indicates a potentially hazardous situation which, if not avoided, may result in minor or moderate injury.

CAUTION used without the safety alert symbol indicates, a potentially hazardous situation which, if not avoided, may result in property damage.

Read and follow all safety information and instructions.

GENERAL INSTRUCTIONS

⚠ WARNING

These instructions must be read and understood before installation of this kit. This product must be installed by a Dometic Service Center or a qualified service technician. Modification of this product can be extremely hazardous and could result in personal injury.

CAUTION

The slide topper cradle kits 3309526.XXX(X) must be installed with all slide topper awnings over lengths of 198". Installations of slide toppers over 198" without the cradle kit 3309526.XXX(X) are not covered by the Dometic Warranty.

INSTALLATION INSTRUCTIONS

Tools Required:

Electric Drill	3/16" Drill Bit
Silicone Sealant	7/32" Drill Bit
Socket Set	Tape Measure
Marker Pen	

Kit Contains:

- 1 ea Cradle Assembly
- 1 ea Instructions
- 4 ea Screw, Lag 1-1/4"x1/4"
- 2 ea Screw, 1/4"-20 x 1-1/4" (except in .154(X))
- 2 ea Nut, Locking 1/4"-20 (except in .154(X))
- 1 ea Anti-Billow Bracket Spacer Kit
- 1 ea Anti-Billow Bracket Kit


A. Application

The 3309526.XXX(X) cradle kits is designed for extra support in the center of A&E Deluxe Slide Topper Awnings. The Cradle Kit can be used with any length of A&E Deluxe Slide Topper Awning; however, it is required for lengths over 198". Installation of the anti-billow kits is required on both ends of all Slide Topper awnings over 198".

Note: Replace (X) with color code:

- B = Polar White
- H = Mende White
- R = Champagne
- S = Satin
- U = Black
- V = Gold

FIG. 1

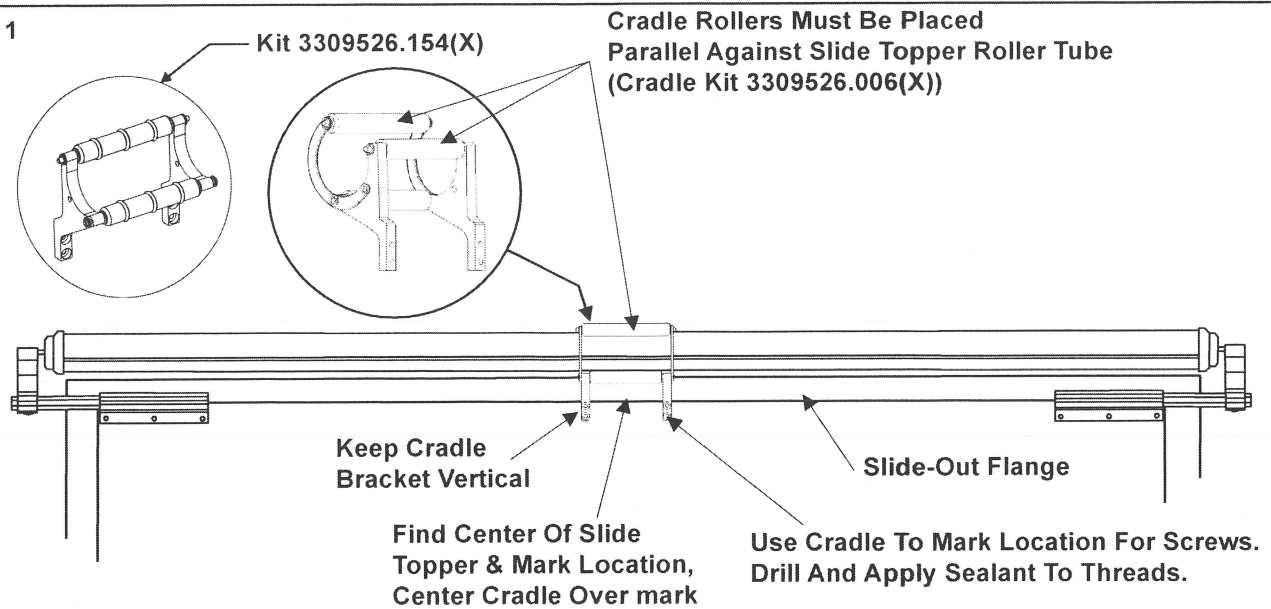

B. Location

1. The slide topper must be installed per its installation instructions prior to installation of the cradle kit.
2. Using the tape measure, find the center of the Deluxe Slide Topper and mark location with the marker pen on the slide-out flange just below the awning center. See FIG. 1.
3. Swing top roller pivot open to allow roller tube to seat in cradle. (Not applicable to kit .154(X)).
4. Center the cradle assembly over the mark on the slide-out flange. See FIG. 1.
5. Place the cradle assembly rollers parallel against the slide topper roller tube. See FIG. 1.
6. Mark location for cradle mounting screws (1-1/4" x 1/4") and drill with 3/16" drill (7/32" drill, if into steel).
7. Put Silicone sealant in the screw holes and on screws.
8. Place cradle in position and tighten screws. Top Roller pivot will swing up to put top roller in position.
9. Install 1/4"-20 screw & locking nut to secure top roller pivot. See Figure 2. (Not applicable to kit .154(X)).
10. Retract slide-out and extend to test slide out.
11. Readjust alignment as required.
12. Retract slide-out and extend to re-test operation.
13. Installation of the cradle is completed.
14. Refer to your Slidetopper Installation and Operation Instructions for directions to install the related anti-billow kits.

FIG. 2

