


016398

NOTES:

1. ITEMS 2 & 3 TO BE MOUNTED ANYWHERE ALONG SHOWN SURFACE BUT AS CLOSE TO BREAK LEVER AS POSSIBLE.
2. USE AMP P/N 90287-1 OR EQUIVALENT CRIMPING TOOL FOR INSTALLING PINS.
3. CUT-OFF WATERPROOF CONNECTOR TO APPLY AMP CONN.

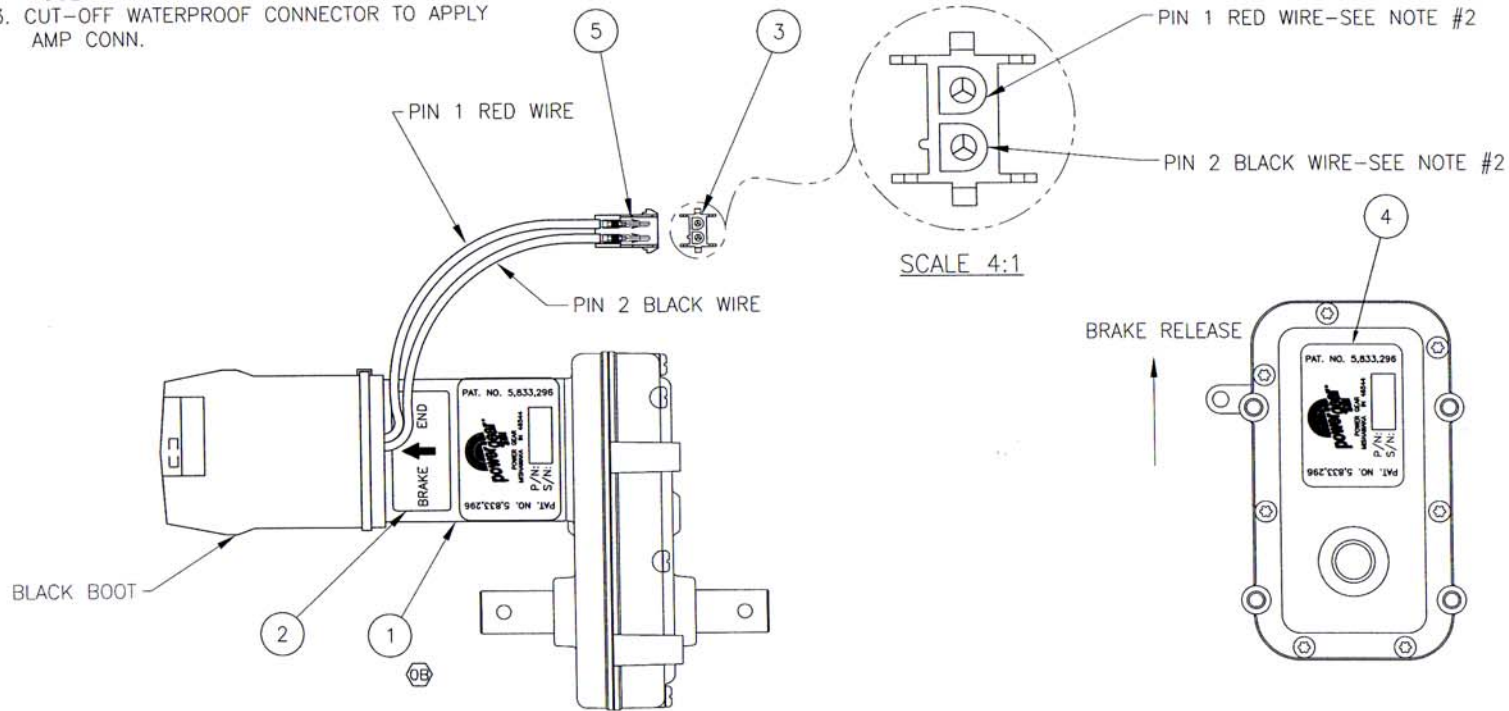

5	2	14-1107	PIN MALE AMP
4	2	101550	DECAL, PART NUMBER/DATE
3	1	14-1108	2 PIN HOLDER F AMP
2	1	520216	DECAL, MOTOR BRAKE OVERRIDE
1	1	1510000006	GEARMOTOR DS MX2 W/O PIN-B
ITEM QTY REQD		PART NO.	DESCRIPTION
TITLE GEARMOTOR ASSY DS MX2 W/MALE CONN & W/O PIN-B			
PRODUCT MAIL ASSEMBLY			
SCALE 1:2	DRAWN MJL	DATE 07/22/03	SHEET 1 OF 1
SIZE B	DWG NO. 524327	REV. 0B	

REV	DESCRIPTION	ECR	DATE	BY
1	RELEASED TO PRODUCTION	7016	01/18/06	DOW
06	1510000006 w/ 130-1204C	7773	5/18/06	OK

power gear
1217 E. SEVENTH STREET • MIDLAND, IOWA 46544
FAX: (574) 255-5029 • PH: (574) 254-5260
This document and the information contained herein is the sole property of POWER GEAR. Any use or reproduction of this drawing without authorization from POWER GEAR may warrant legal action against user.

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES.
TOLERANCES ARE:
DECIMALS ANGLES
.XX ±.01
.XXX ±.010
BREAK ALL SHARP EDGES .005/.030
DO NOT SCALE DRAWING