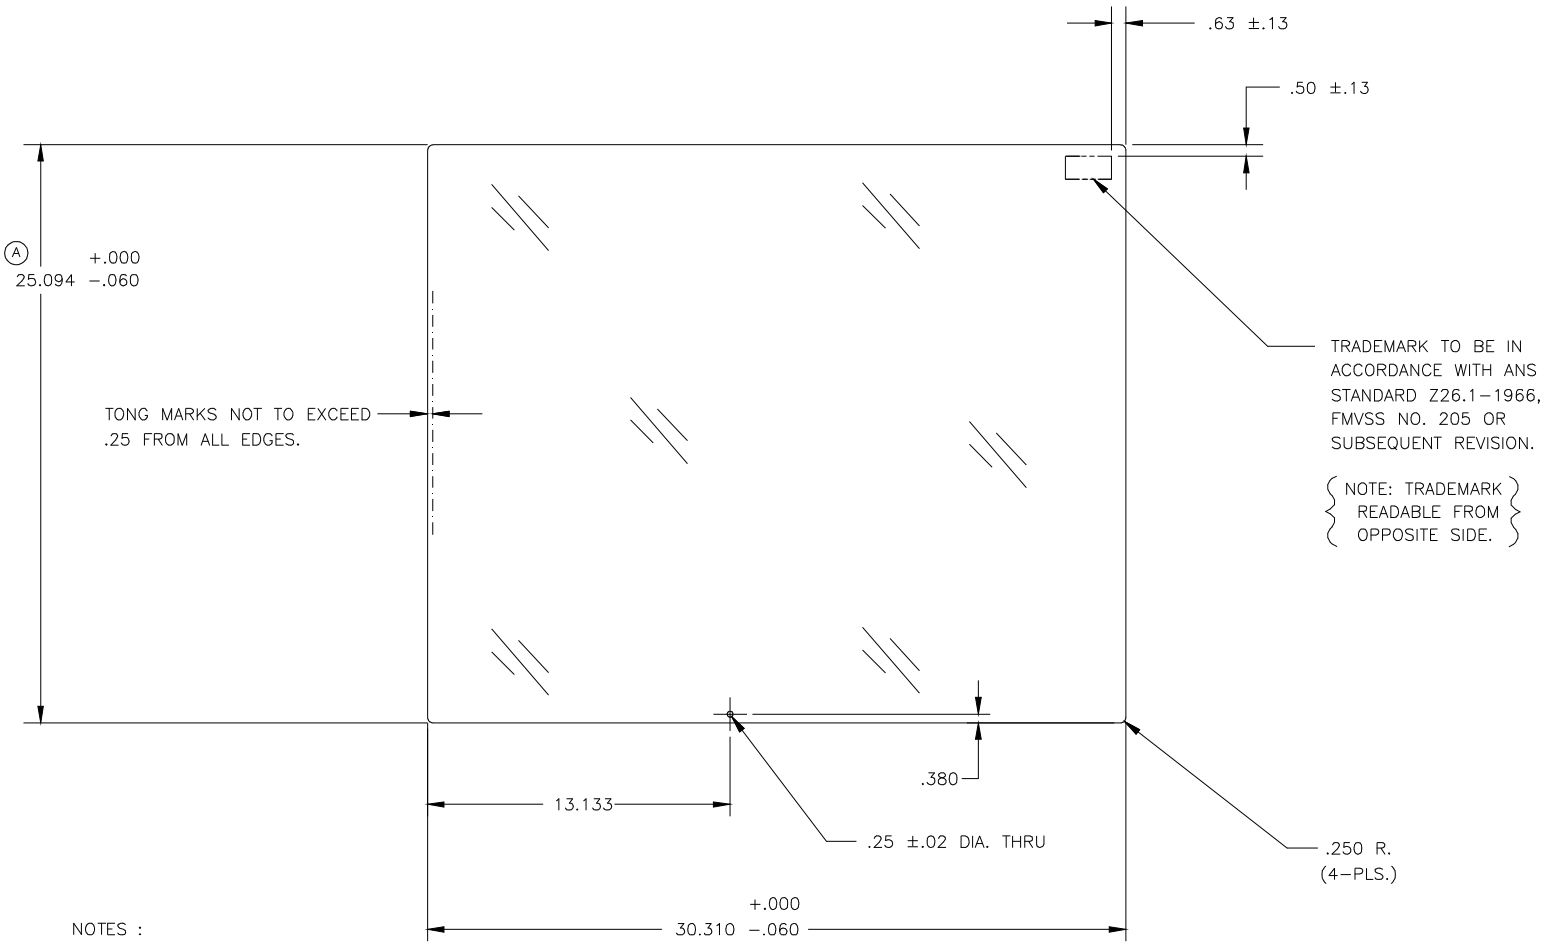

NOTES :

1) MATERIAL : AS−2 TEMPERED SAFETY GLASS, .125 AUTOTINT.
2) EDGES MAY NOT DEPART FROM STRAIGHT, FORM, OR FLATNESS MORE THAN .030 IN ANY 6" SEGMENT AS MEASURED FROM CHECKING FIXTURE OR TEMPLATE.
3) INDENTATIONS ARE TO BE LIGHT, MARKS & DEFORMATIONS WHICH CAUSE DISTORTION ARE NOT PERMITTED.
4) CERTIFICATION OF D.O.T. REQUIREMENTS FOR USE IN PASSENGER VEHICLES TO BE PROVIDED BY SUPPLIER.
5) P.I. = POINT OF INTERSECTION.
6) GLASS MUST BE SQUARE WITHIN 1/32" PER 12".
7) INSPECT TO ATWOOD GLASS STANDARDS.
8) INSIDE VIEW, LEFT HAND SHOWN.
9) MUST COMPLY WITH ALL APPLICABLE SECTIONS OF FMVSS 205.
(B) 10) #4 EDGE ON BOTTOM, AND #1 EDGE ON ALL OTHER SIDES.

ZONE	E.C. NO.	LETTER	DESCRIPTION OF CHANGE	BY	CK'D.	DATE
A1	EC5539	B	ADDED NOTE #10; #4 EDGE ON BOTTOM, & #1 EDGE ON ALL OTHER SIDES	DM	MS	12-13-01
~	EC5421	A	25.094 WAS 26.094	MS		9-7-01
~	PR0469	AR	RELEASED FOR PRODUCTION	DM		6-30-99
~	~	**	AS DRAWN	DM		4-16-99

DRAWING BY:	CHECKED BY:	APPROVED BY:	APPROVED BY:
D.A. MADDUX 4−16−99			

FINISH:	NOTED
MATERIAL:	NOTED
FILENAME:	106042213

SPECIAL NOTICE
THIS DRAWING IS THE PROPERTY OF ATWOOD MOBILE PRODUCTS. IT SHALL NOT BE COPIED OR DUPLICATED IN ANY MANNER, AND SHALL NOT BE SUBMITTED TO OUTSIDE PARTIES FOR EXAMINATION WITHOUT OUR CONSENT. IT SHALL BE USED WITH REFERENCE TO WORK UNDER CONTRACT OR PROPOSALS SUBMITTED BY ATWOOD MOBILE PRODUCTS ONLY.

DRAWING SCALE: 1/4

Atwood Mobile Products
Atwood Center
Elkhart, Indiana

TOLERANCES UNLESS OTHERWISE SPECIFIED
3 PLACE DEC. DIMS. ±.030
2 PLACE DEC. DIMS. ± X
ANGULAR DIMENSIONS ± 0°30'

ROLL−UP GLASS

3−106−042213

V242