



NEWMAR #	MATERIAL	FINISH	FABRICATION	DESCRIPTION	LENGTH TOLERANCE
153482	6063-T5	MILL	—	ALUM, STR TUBE, 0.062 X 1.500 X 77.563	+0.000/-0.063
158255	6063-T5	MILL	—	ALUM, STR TUBE, 0.062 X 1.500 X 78.8125	+0.000/-0.063
153480	6063-T5	MILL	—	ALUM, STR TUBE, 0.062 X 1.500 X 79.188	+0.000/-0.063
153483	6063-T5	MILL	—	ALUM, STR TUBE, 0.062 X 1.500 X 82.875	+0.000/-0.063
149013	6063-T5	MILL	—	ALUM, STR TUBE, 0.062 X 1.500 X 168.000	

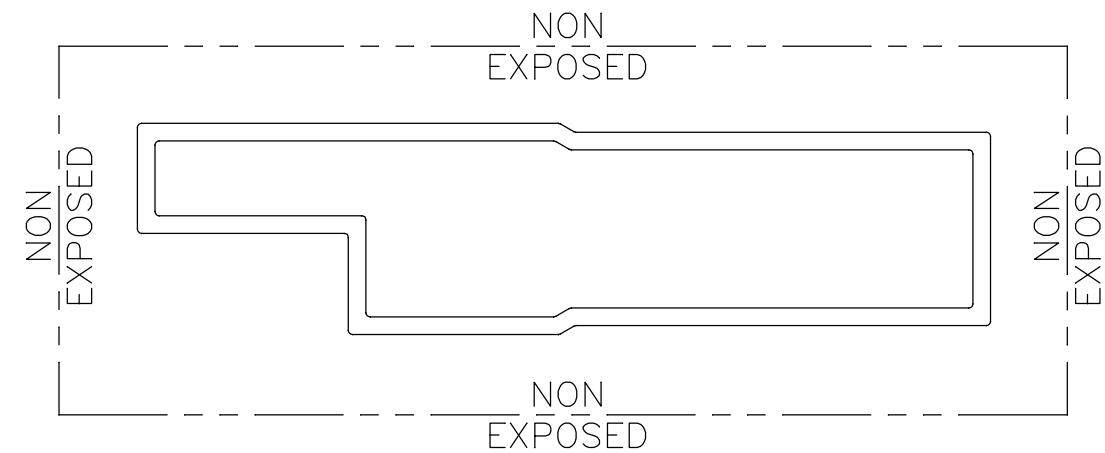

ACTUAL SIZE

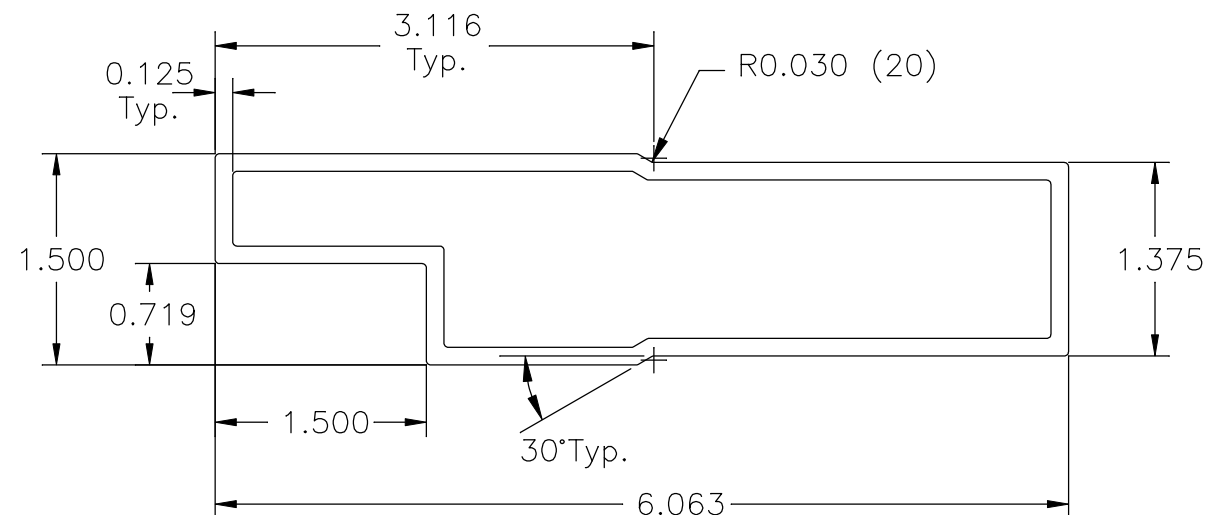

- NOTE:
1. TYPICAL WALL THICKNESS = .125 ±.006
 2. MAX. ALLOWABLE TWIST .022”/FT
 3. BREAK SHARP EDGE (R0.030)
 4. AREA: 1.8167 SQ.IN.
 5. PERIMETER: 28.9095 IN.
 6. EST. WEIGHT/FT.: 0.0#

NEWMAR CORP P.O. Box 30, Nappanee, IN. 46550 UNITS: INCHES TITLE BLOCK: 1TB	Model:	Sheet	Drawn by:	Checked by:	Revision:	By:
	SEE INDEX	1 OF 1	J. K.			Date:
	Title:	I.D. # ENG_M	Date:	Date:	Revision:	By:
	ALUM, STR TUBE, 6.063 X 1.500	AT_SPEC\EXT\ ALUM_STR_TUBE_6.063X1.500	5/7/20			Date: