


WHRVCTK-35

RV-C BUS W/POWER HARNESS

****LOOM WIRES, STOP
WITHIN 2" OF THE ENDS**

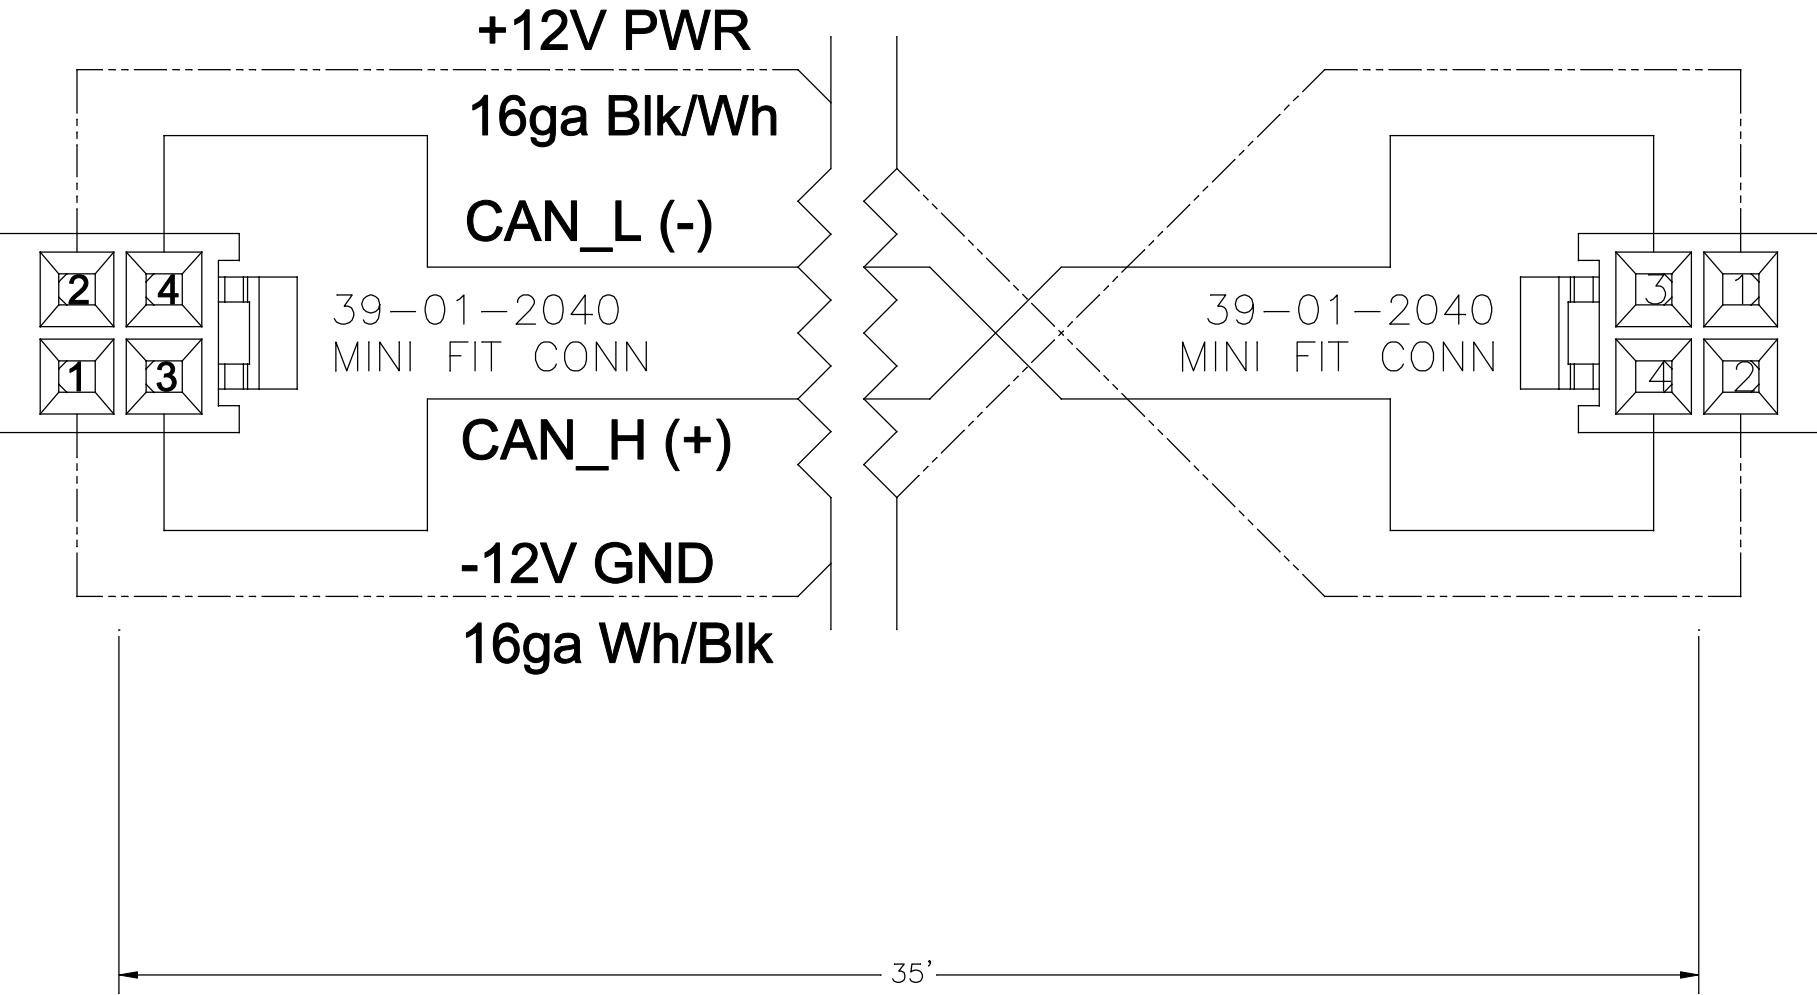

RV-C CABLE SPECIFICATIONS:
STRANDED COPPER UNSHIELDED BLUE/WHITE TWISTED PAIR
JACKET MATERIAL (TEMPERATURE RATING): PVC (-20 TO 105 DEG. C)
CHARACTERISTIC IMPEDENCE: 95 - 140 OHM
TWISTS: 25 - 35 TWISTS/METER
MAIN TRUNK: 18 - 24 AWG
DROPS: 22 - 24 AWG (PERMISSIBLE TO SUBSTITUTE MAIN TRUNK CABLE)
TWISTED PAIR WIRE COLOR: CAN_L (-) BLUE / CAN_H (+) WHITE
ALT COLOR: CAN_L (-) GREEN / CAN_H (+) YELLOW

RV-C (BUS) CABLE:
WIRED AS STRAIGHT THRU CONNECTIONS (PIN TO PIN)

POWER WIRE SPECIFICATIONS:
BLACK/WHITE 16 AWG STRANDED COPPER (+)
WHITE/BLACK 16 AWG STRANDED COPPER (GND)

PHONE CABLE:
WIRED AS REVERSED CONNECTIONS (CONNECTORS FLIPPED)

NEWMAR CORP P.O. Box 30, Nappanee, IN. 46550 UNITS: INCHES TITLE BLOCK: 1-2FULTB	Model:	Sheet	Drawn by:	Checked by:	Revision:	By:
	SACC, MADP, LADP, EXDP, KGDB	1 OF 1	T. L.			Date:
	Title:	I.D. # 2023\ ELECTRICAL\HARNESS\ WHRVCTK-35_162534	Date:	Date:	Revision:	By:
	RV-C TRUNK 35'		2/15/22			Date: