


NOTES:

- um developed length - 70'
- Black mall pipe
- I.D. copper type "L"
- length of copper type to appliance per test
- ane Distribution System Complies With The Parameters Set By Table 5.3.4 (NFPA 1192)
- ass fittings below floor to be forged--not milled
- um developed length of flex hose - 72"

MAX BTU VALUES	
URNACE	40,000
NGE	29,800
FRIGERATOR	1,500
ATER HEATER	12,000
TOTAL BTU	85,300

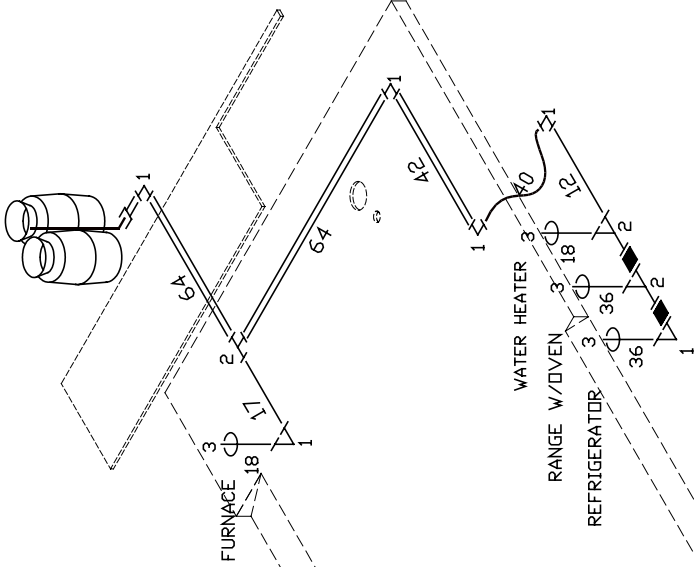

Mounting Clamp

- Rubber Coated Steel Clamp Used To Secure Gas Manifold
- Plastic Clamp Used To Secure Copper Tubing
- Grommets Used To Protect Copper Through Floors, Walls, Cab. Partitions, Etc.

KEY	DESCRIPTION
1	1/2" BLK ELL
2	1/2" BLK TEE
3	1/2" FL x 3/8" BRASS UNION MPT

MAR CORP D. Box 30, nee, IN. 46550 ck--PB_TB-T4_09	Model: CPFW 33RLSH Title: PROPANE GAS	Sheet 3 OF 3	Drawn by: T. M.	Checked by: D. B.	Revision/REMOVED "BY RVIA TEST" IN NOTES (PCR #87633)	
		I.D. # 2009/ TOW/CODE/PLUM/CP/4630L/SH	Date: 1/17/08	Date: 2/7/08	By: M.B. Date:10/21/08	
			Revision/REV MAX BTU FOR FURNACE TO 40000 ILO 42000 (ECO #728)		By: M.B. Date:9/9/08	