

um developed length - 70'

Black mall pipe

I.D. copper type "L"—


length of copper type to appliance per test

ane Distribution System Complies With The Parameters Set By Table 5.3.4 (NFPA 1192)


brass fittings below floor to be forged--not milled

um developed length of flex hose - 72"

MAX BTU VALUES	
BURNACE	40,000
ENGINE	29,800
REFRIGERATOR	1,500
WATER HEATER	12,000
TOTAL BTU	85,300

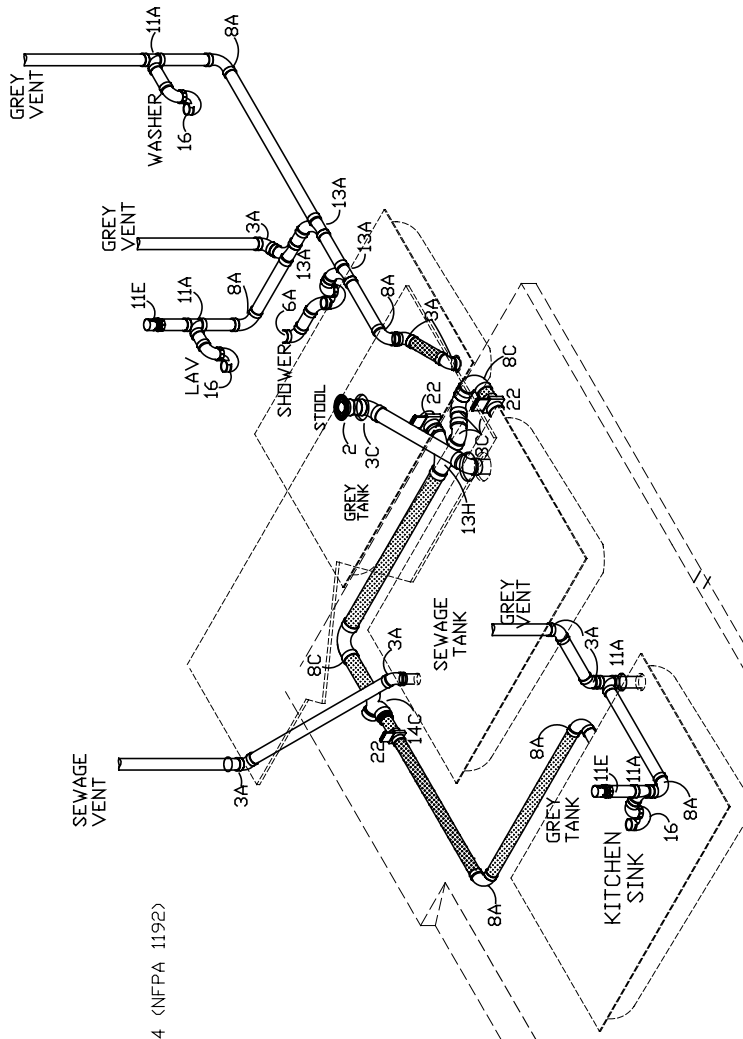

Mounting Clamp



- Rubber Coated Steel Clamp Used To Secure Gas Manifold
- Plastic Clamp Used To Secure Copper Tubing
- Grommets Used To Protect Copper Through Floors, Walls, Cab. Partitions, Etc.

KEY	DESCRIPTION
1	1/2" BLK ELL
2	1/2" BLK TEE
3	1/2" FL x 3/8" BRASS UNION MPT


Model:	Sheet	Drawn by:	Checked by:				
CPFW 32CKAH	1 OF 3	T. M.	D. B.				
Title:	I.D. #	Date:	Date:				
DRAIN PLUMBING	TOW/CODE/PLUMB/CP/W/32CKAH	3/13/08	3/20/08				
				Revision:	DELETE	CLEANOUT FROM WASHER LINE	
				By:			
				Date:	9/2/08		

OMITTED VENT TO ODS, ADDED VENT IN LAV LINE PER (PCR #87411) M. B.

6/6/08

NOTES:

Fresh water lines on Alres are 1/2" TuffPex-A
Fresh water lines on Stars are 1/2" TuffPex-A
s are installed at low points
listed swivel connections (listing #17062)
enotes 1/2" x 48" Faucet riser
all 18" high pressure hose at pump discharge

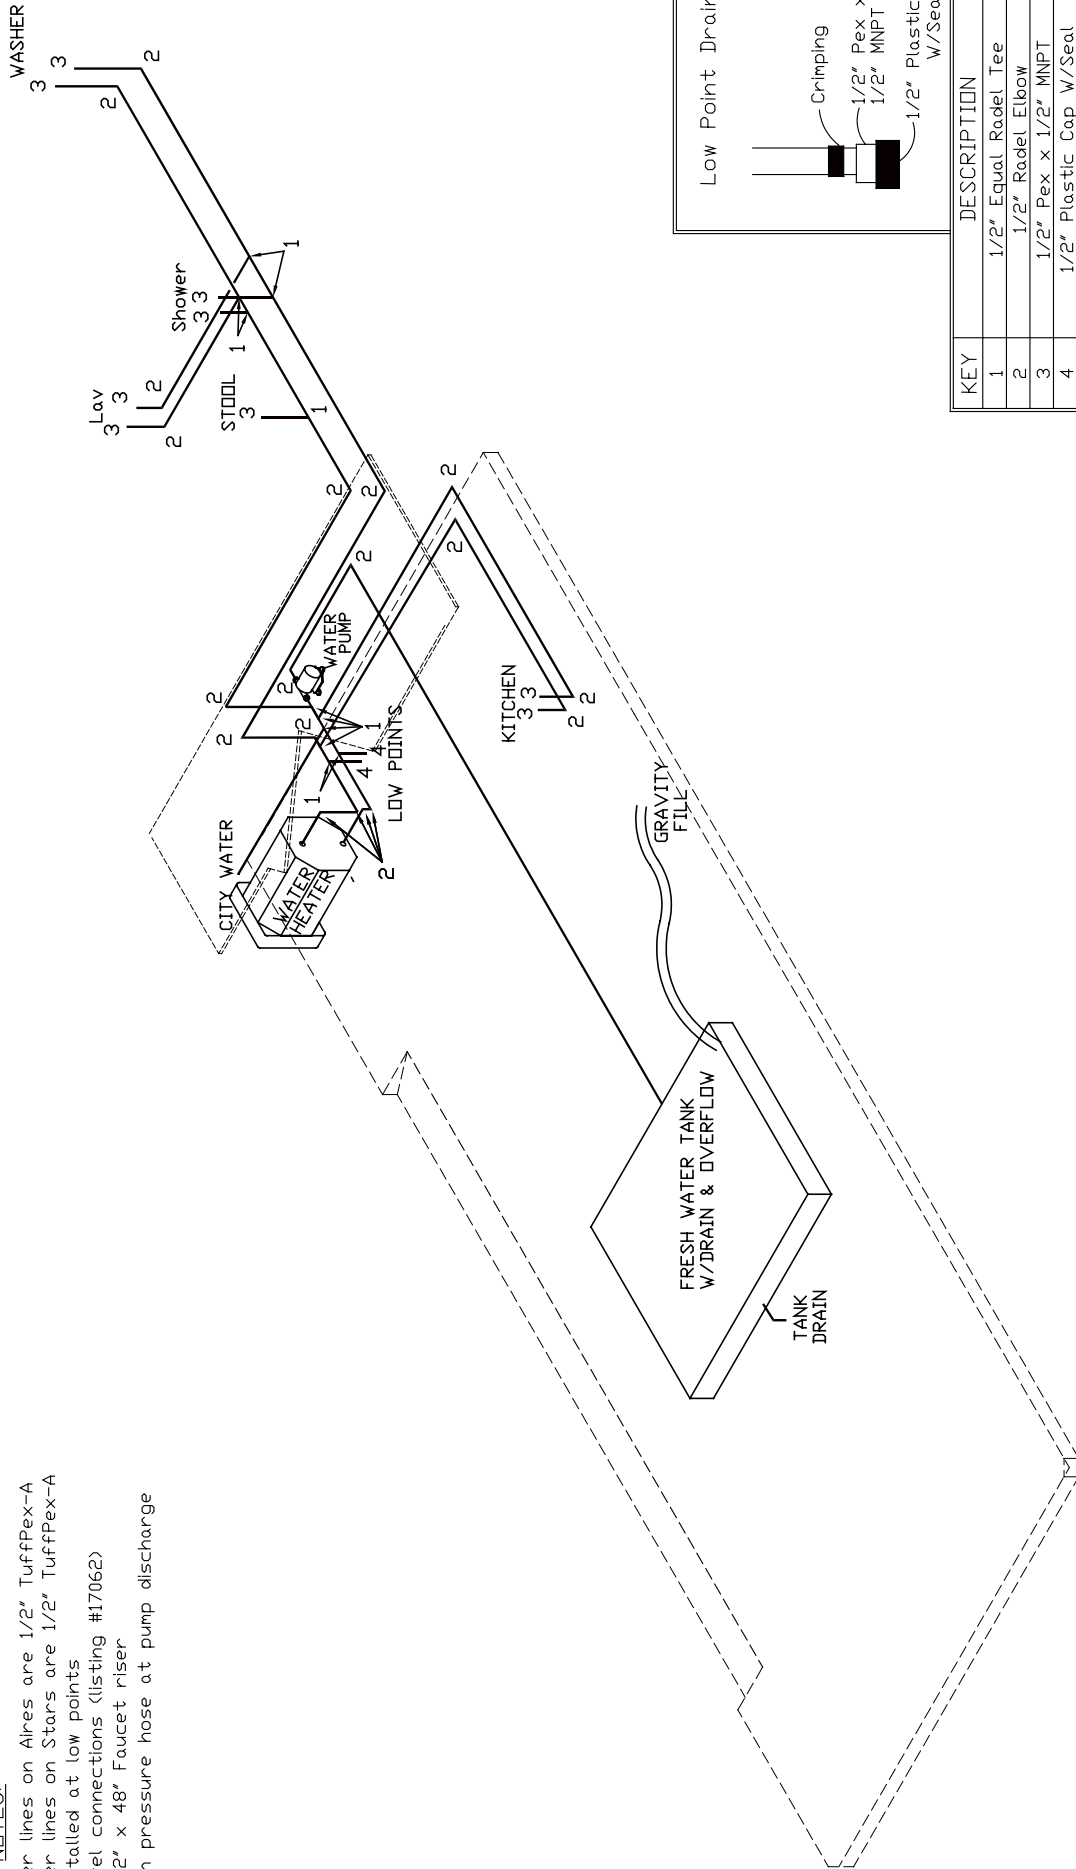

MAR CORP Box 30, nee, IN. 46550 ock--PB_TB-T4_09	Model:	CPFW 32CKAH	Sheet	2 OF 3	Drawn by:	T. M.	Checked by:	D. B.	Revision:	By:
	Title:	WATER LINES	I.D. #	2009/	Date:	3/13/08	Date:	3/20/08	Revision:	Date:
					TOW/COOP/PLUM/CPFW/2009/04H					