

um developed length of flex hose = 72"

1/30/08

NOTES:

um developed length - 70'

Black mall pipe
I.D. copper type "L"


length of copper type to appliance per test

lance Distribution System Complies With The Parameters Set By Table 5.3.4 (NFPA 1192)


ass fittings below floor to be forged--not milled

um developed length of flex hose - 72"

MAX BTU VALUES	
MAX BTU	40,000
MAX BTU	29,800
MAX BTU	1,500
MAX BTU	12,000
MAX BTU	85,300

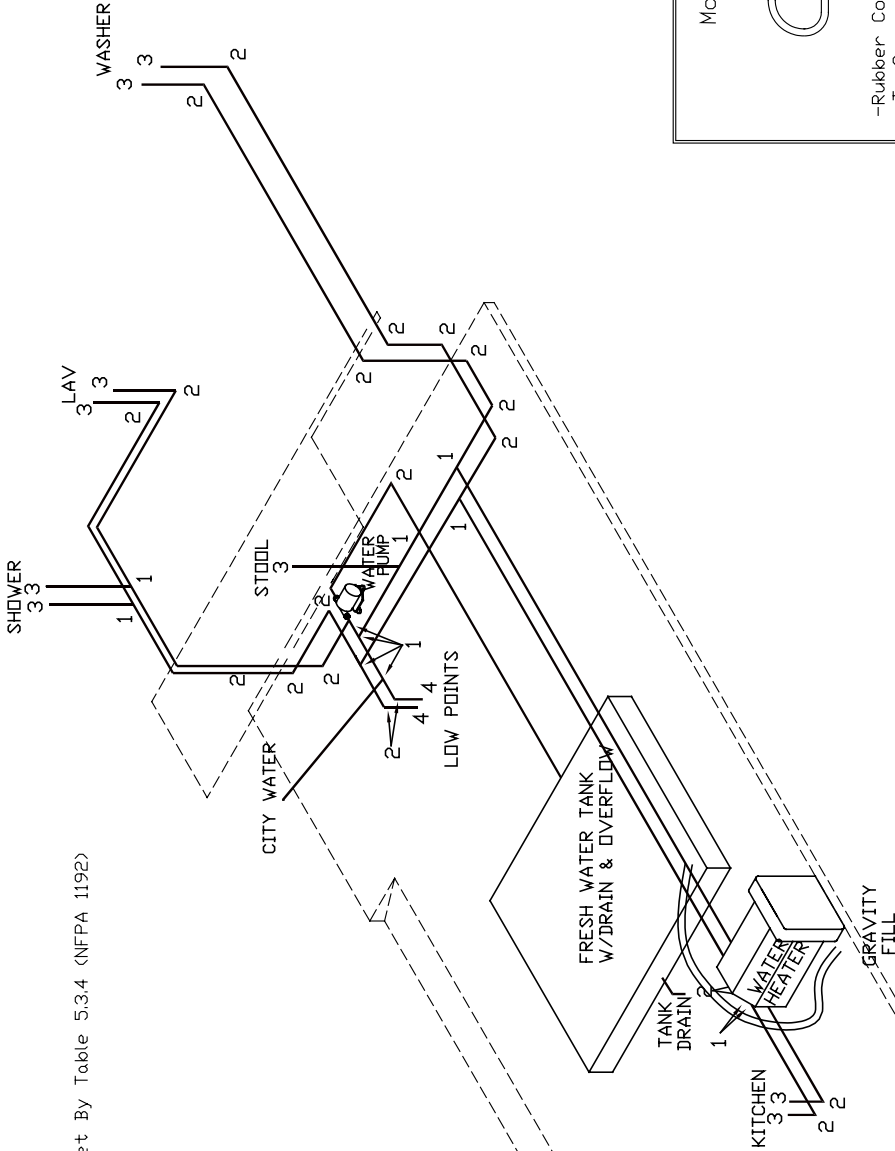

Mounting Clamp



- Rubber Coated Steel Clamp Used To Secure Gas Manifold
- Plastic Clamp Used To Secure Copper Tubing
- Grommets Used To Protect Copper Through Floors, Walls, Cab. Partitions, Etc.

KEY	DESCRIPTION
1	1/2" BLK ELL
2	1/2" BLK TEE
3	1/2" FL x 3/8" BRASS UNION MPT

MAR CORP P.O. Box 30, nee, IN. 46550 Block--PB_TB-T4_09	Model:	CPFW 32RKSH	Sheet	2 OF 3	Drawn by:	M. B.	Checked by:	D. B.	Revision:		By:	
	Title:	WATER LINES	I.D. # 2009/ TOW/COOP/PLUM/CPW32RKSH	Date:	10/10/07	Date:	11/1/07	Revision:		By:	Date:	