


Maximum developed length of flex hose - 72"

MAX BTU VALUES	
FURNACE	40,000
RANGE	29,800
REFRIGERATOR	1,500
WATER HEATER	12,000
TOTAL BTU	85,300

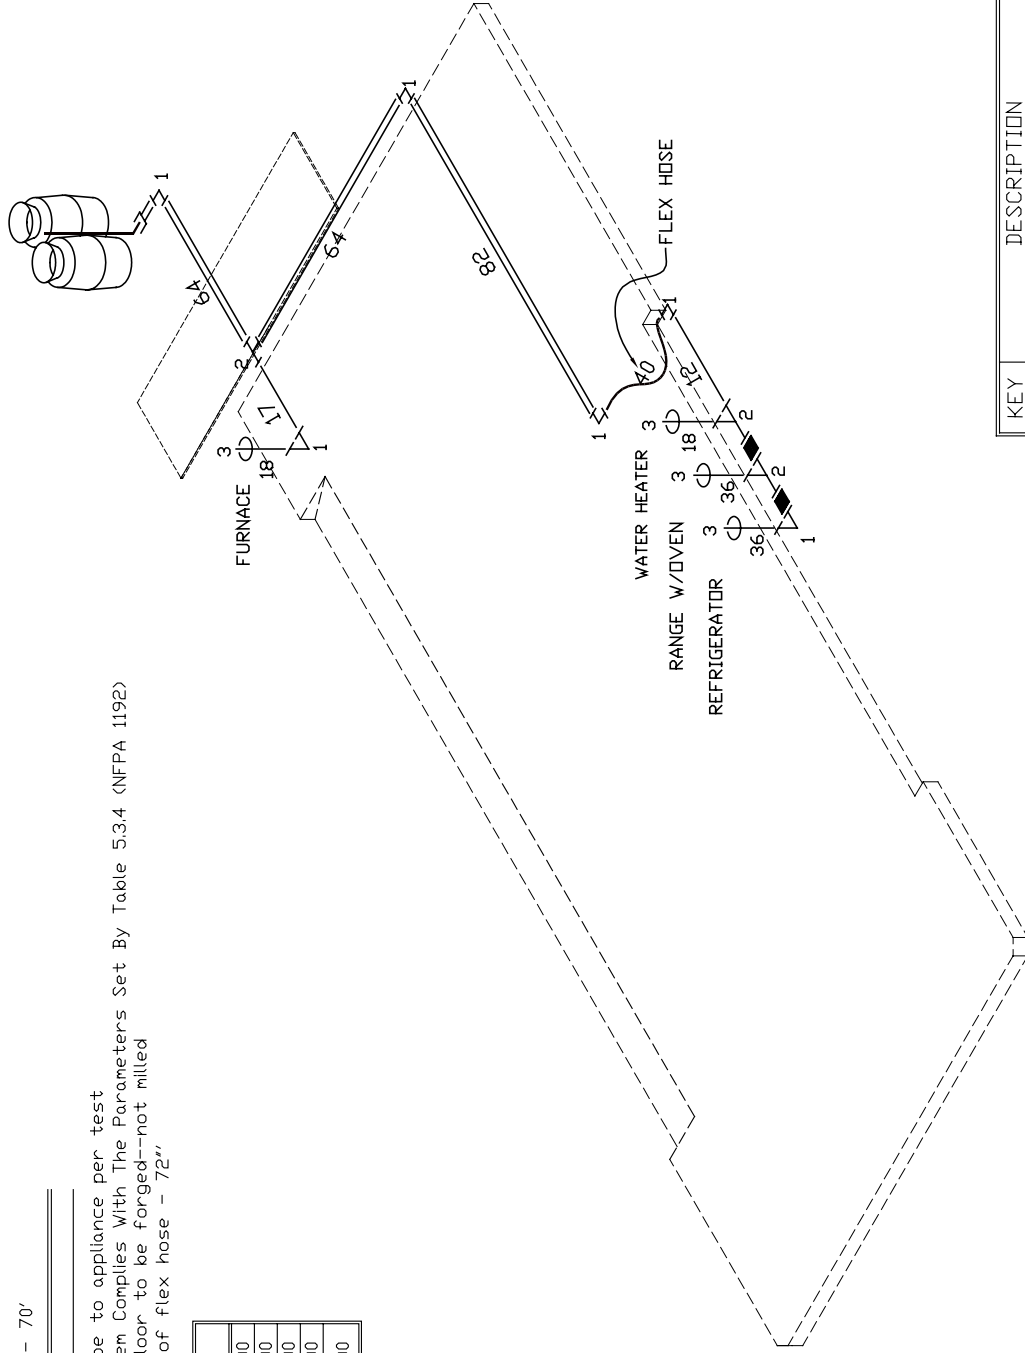

- Rubber Coated Steel Clamp Used To Secure Gas Manifold
- Plastic Clamp Used To Secure Copper Tubing
- Grommets Used To Protect Copper Through Floors, Walls, Cab. Part. Etc.

KEY	DESCRIPTION
1	1/2" BLK ELL
2	1/2" BLK TEE
3	1/2" F1 x 3/8" BRASS UNION MPT

NEWMAR CORP P.O. Box 30, Nappanee, IN. 46550	Model: TPFW 33RLSH	Sheet 3 OF 3	Drawn by: M. B.	Checked by: D. B.	Revision: REMOVED "BY RVIA TEST" IN NOTES (PCR #87633)	By: M. B.
Title: PROPANE GAS		I.D. # 2009/ TOW/ODE/PLUM/TPFW33RLSH	Date: 2/20/08	Date: 3/7/08	Revision: REV MAX BTU FOR FURNACE TO 40000 ILD 42000 (ECO #728)	Date: 10/21/08
Title block--PB_TB-T4_09						Date: 9/9/08