


Maximum developed length of flex hose - 72"

MAX BTU VALUES	
FURNACE	40,000
RANGE	29,800
REFRIGERATOR	1,500
WATER HEATER	12,000
TOTAL BTU	85,300

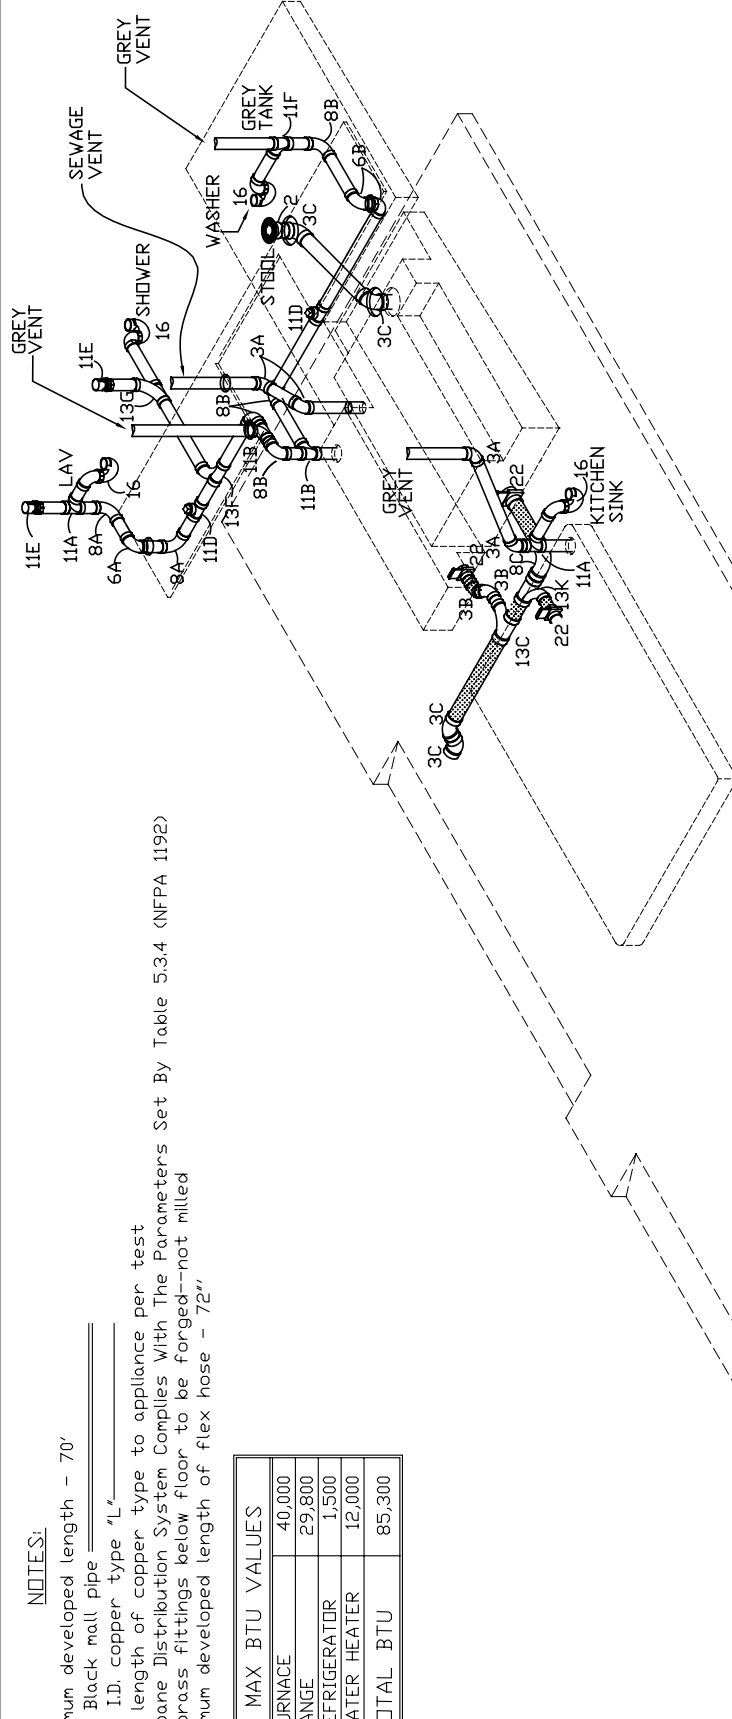


- Rubber Coated Steel Clamp Used To Secure Gas Manifold
- Plastic Clamp Used To Secure Copper Tubing
- Grommets Used To Protect Copper Through Floors, Walls, Cab. Part. Etc.

KEY	DESCRIPTION
1	1/2" BLK ELL
2	1/2" BLK TEE
3	1/2" FL x 3/8" BRASS UNION MPT

Model:	Sheet	Drawn by:	Checked by:	Revision:	By:
TPFW 39QSRL	1 OF 3	T. M.	D. B.		
Title:	I.D. # 2009/	Date:	Date:	Revision:	By:
DRAIN PLUMBING	TDW/CDE/PLUM/TPFW39QSRL	4/14/08	4/18/08		
Title block--PB_TB-T4_09					

NOTES:

- All fresh water lines on Aires are 1/2" TuffPex-A
- All Fresh water lines on Stars are 1/2" TuffPex-A
- Drains are installed at low points
- TEI listed swivel connections (listing #17062)
- **--Denotes 1/2" x 48" Faucet riser
- Install 18" high pressure hose at pump discharge

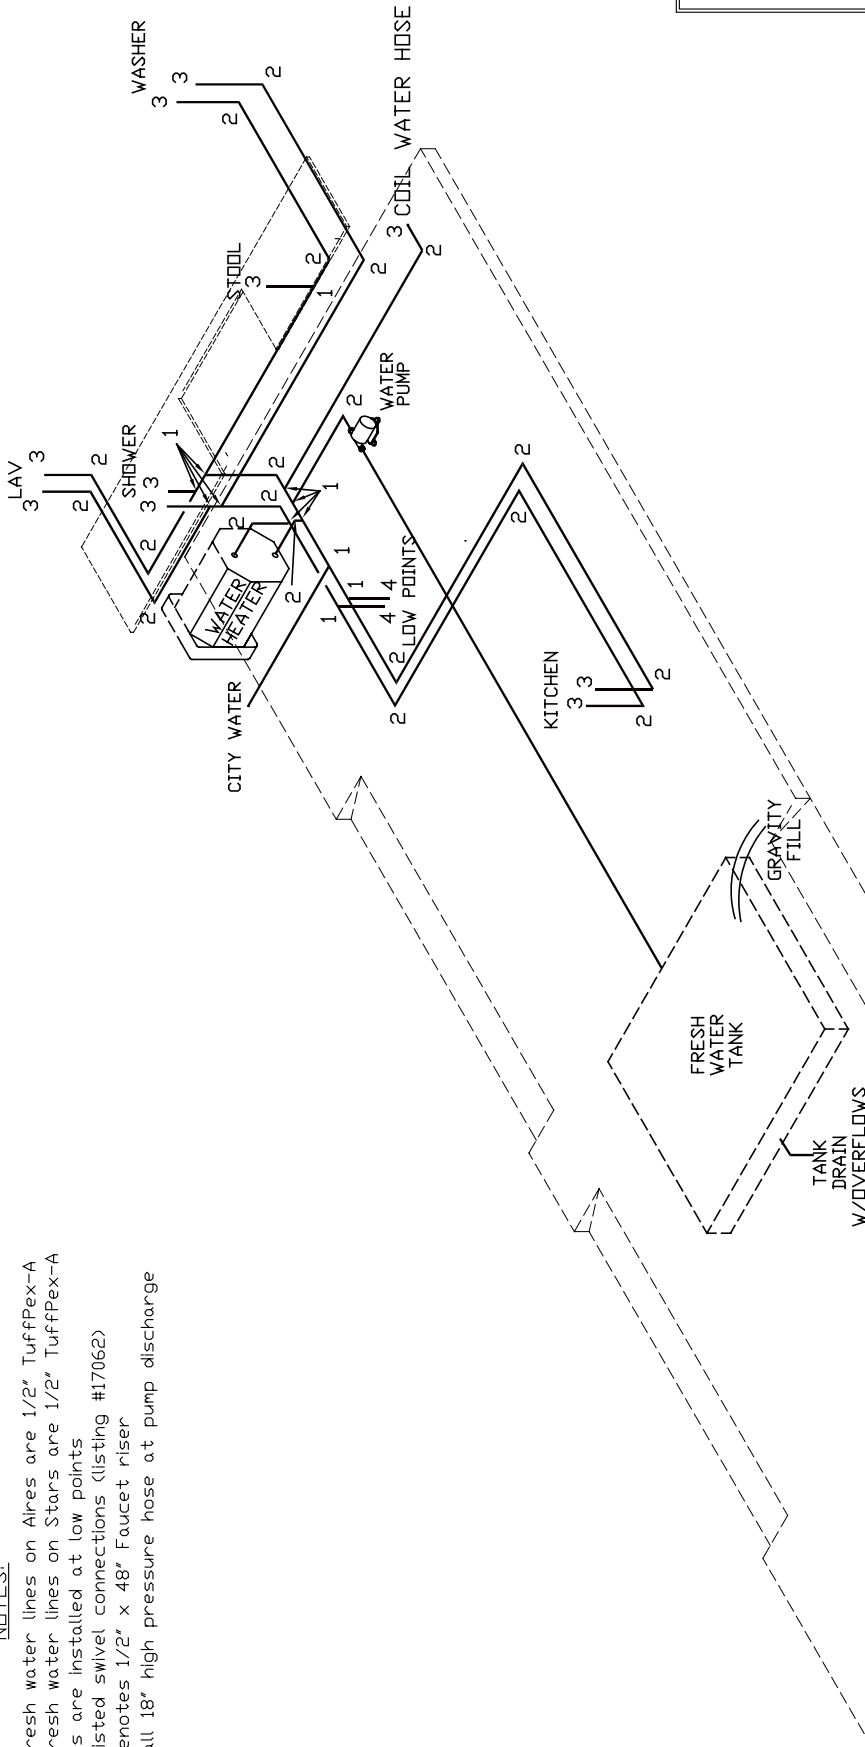

Low Point Drain

1/2" Pex x 1/2" MNPT

1/2" Plastic Cap W/Seal

KEY	DESCRIPTION
1	1/2" Equal Radel Tee
2	1/2" Radel Elbow
3	1/2" Pex x 1/2" MNPT
4	1/2" Plastic Cap W/Seal

NEWMAR CORP P.O. Box 30, Nappanee, IN. 46550 Title block--PB_TB-T4_09	Model: TPFW 39QSRL Title: WATER LINES	Sheet 2 OF 3	Drawn by: T. M.	Checked by: D. B.	Revision:
		I.D. # 2009/ TOW/CODE/PLUM/TPFW39QSRL	Date: 4/14/08	Date: 4/18/08	By: Date: