



NOTES:

ALL MATERIALS USED IN THE DRAINAGE SYSTEM CONFORM TO NFPA 1192 7.1.1
DRAIN GRADE SET AT 1/8 INCH PER FOOT MINIMUM
DRAIN LINES ARE SUPPORTED AT A MAXIMUM INTERVAL OF 4 FEET
TRAP ARM GRADE SET AT 1/4 INCH PER FOOT MINIMUM (TOTAL SLOPE DOES NOT EXCEED PIPE DIAMETER)
MAXIMUM TRAP ARM LENGTH IS 54"
ALL TRAPS ARE A MINIMUM REQUIRED SIZE OF 1 1/4" EXCEPT THE WASHER (IF APPLICABLE) REQUIRES 1 1/2"
SEE WASHER TYPICAL FOR WASHER PLUMBING
BATH FLOOR LOCATION-----

SIZE OF TRAP ARM IN.	DISTANCE FROM TRAP TO VENT F.T.
1 1/4	4 1/2
1 1/2	4 1/2
2	5
3	6

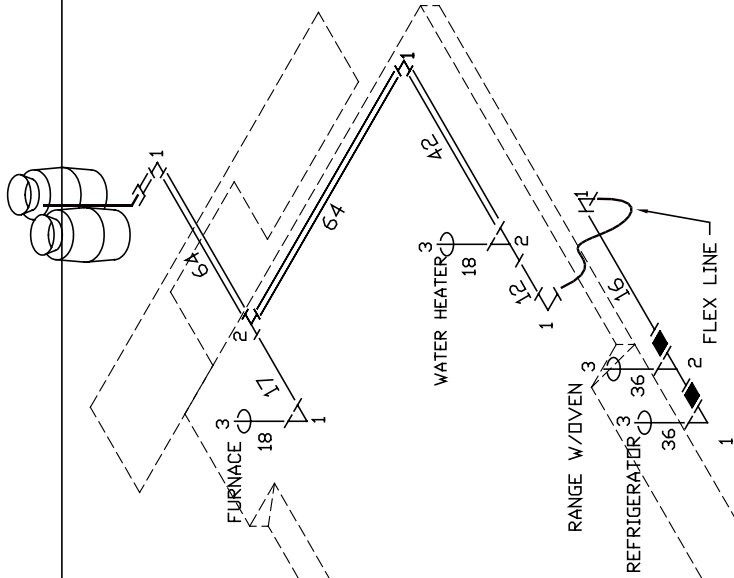

NEWMAR CORP

P.O. Box 30,

Nappanee, IN. 46550

Model:

XAF W 38CKTH

Title:

PROPANE GAS

Title block--PB_TB-T4_08

Sheet

3 OF 3

Drawn by:

T. M.

Checked by:

D. B.

Revision/REV MAX BTU FOR FURNACE TO 40000 ILD 42000 (ECO #728)By: M.B.

Date:9/9/08

By:

Date:

Revision:

Date:

</