



NOTES:

ALL MATERIALS USED IN THE DRAINAGE SYSTEM CONFORM TO NFPA 1192 7.1.1
DRAIN GRADE SET AT 1/8 INCH PER FOOT MINIMUM
TRAP LINES ARE SUPPORTED AT A MAXIMUM INTERVAL OF 4 FEET
TRAP ARM GRADE SET AT 1/4 INCH PER FOOT MINIMUM (TOTAL SLOPE DOES NOT EXCEED PIPE DIAMETER)
MAXIMUM TRAP ARM LENGTH IS 54"
ALL TRAPS ARE A MINIMUM REQUIRED SIZE OF 1 1/4" EXCEPT THE WASHER (IF APPLICABLE) REQUIRES 1 1/2"
SEE WASHER TYPICAL FOR WASHER PLUMBING
BATH FLOOR LOCATION-----

SIZE OF TRAP ARM IN.	DISTANCE FROM TRAP TO VENT F.T.
1 1/4	4 1/2
1 1/2	4 1/2
2	5
3	6

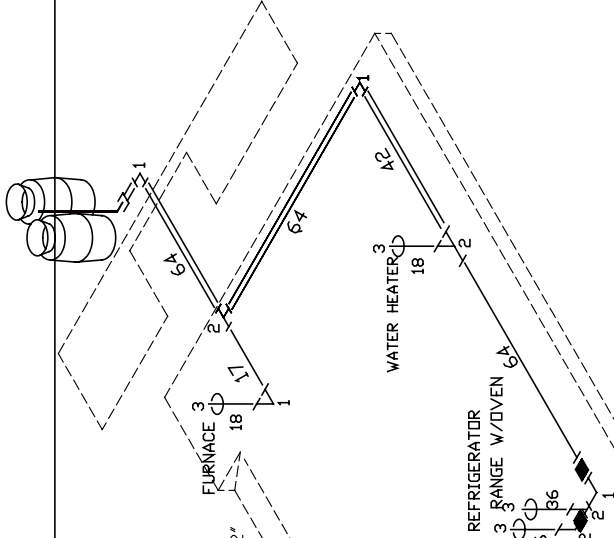

NEWMAR CORP P.O. Box 30, Nappanee, IN. 46550 Title block--PB_TB-T4_08	Model: XAF W 41CKLG	Sheet 3 OF 3	Drawn by: T. M.	Checked by: D. B.	Revision/REV MAX BTU FOR FURNACE TO 40000 ILD 42000 (ECO #728)By: M.B.	
	Title: PROPANE GAS	I.D. # 2009/ TDW/CODE PLUMBING/41CKLG	Date: 1/11/08	Date: 2/7/08	Date: 9/9/08	Date: 9/9/08
Revision:						
By:						
Date:						

KEY	SYM	DESCRIPTION	KEY	SYM	DESCRIPTION
2		CLOSET FLANGE-4"x3"	13A		LG SWP TY-1 1/2"
3A		45° ELL-1 1/2"	13C		LG SWP TY-3"x3"x2"
3B		45° ELL-2"	13D		LG SWP TY-3"x2"x3"
3C		45° ELL-3"	13E		LG SWP TY-2"x2"x1 1/2"
6A		90° ELL-1 1/2"	13F		LG SWP TY-2"x1 1/2"x2"
6B		90° ELL-2"	13G		LG SWP TY-2"x2"x1 1/2"
8A		90° LG SWP ELL-1 1/2"	13H		LG SWP TY-3"
8B		90° LG SWP ELL-2"	13K		LG SWP TY-3"x3"x1 1/2"
8C		90° LG SWP ELL-3"	13J		LG SWP TY-3"x1 1/2"x3"
11A		SAN TEE-1 1/2"	14		DBL LG SWP TY-3"
11B		SAN TEE-2"x1 1/2"x2"	14C		DBL TY-3"
11C		SAN TEE-2"x2"x1 1/2"	15A		TEE WYE-1 1/2"
11D		1 1/2" CLEAN OUT	16		P-TRAP W/UNION JOINT
11E		1 1/2" CHECK VENT	17		TEE WYE-2"
11F		SAN TEE-2"x1 1/2"x1 1/2"	18		2" CLEAN OUT
			19		CLOSET FLANGE 45°
			20		DBL TEE WYE 3"
			21		REDUCER 3" TO 1 1/2"
			22		TERMINATION VALVE