


CN-07FMPMS
(2) TQ-14FT480S
(5) TQ-18FT150S
(2) XX-CSWHT480
XX-LOCK07FMPMS

CONN. 12059472
SEC LK. 12052486

#1 A) 18 DGN low
#2 B) 18 RED high
#3 C) 18 DBL 12" v
#4 D) 18 BLK park
#5 E) 18 PUR gnd
#6 F) 18 BRN
#7 G) 18 PNK

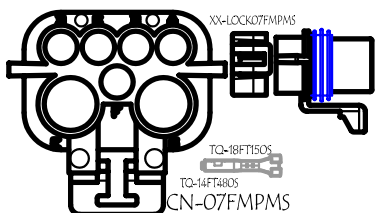


CONDUIT TO BE LOW TEMPERATURE
ENDS OF CONDUIT TO BE TAPED CLOSED
CONDUIT TO BE WITHIN 2" OF THE BACK OF THE CONNECTOR
LENGTHS ARE TO THE END OF THE WIRE

CC-3/8
12.50

CC-1/4
71.00

CC-3/8
50.00



CN-02FTN
TQ-18FDT
CONN. 2989597

#7 A) 18 PNK
#6 B) 18 BRN

CN-05FLWM
TQ-14FDT3
CONN. 62374 EC25WJ

#1 1) 18 DGN
#2 2) 18 RED
#4 3) 18 BLK
#3 4) 18 DBL
#5 5) 18 PUR

