
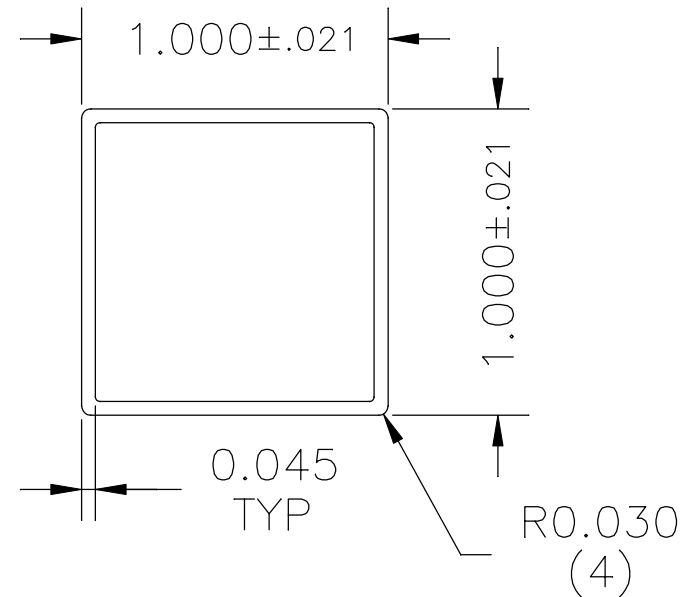


NEWMAR #	MATERIAL	FINISH	FABRICATION	DESCRIPTION	LENGTH TOLERANCE
10949	6063-T5	MILL	-	ALUM, TUBE, 1.000 X 1.000 X 93.500	
35366	6063-T5	MILL	-	ALUM, TUBE, 1.000 X 1.000 X 94.500	
28453	6063-T5	MILL	-	ALUM, TUBE, 1.000 X 1.000 X 94.750	
28680	6063-T5	MILL	-	ALUM, TUBE, 1.000 X 1.000 X 96.875	
36562	6063-T5	MILL	-	ALUM, TUBE, 1.000 X 1.000 X 97.250	
41780	6063-T5	MILL	-	ALUM, TUBE, 1.000 X 1.000 X 98.250	
58681	6063-T5	MILL	-	ALUM, TUBE, 1.000 X 1.000 X 98.375	+0.0625/-0.09375
19469	6063-T5	MILL	-	ALUM, TUBE, 1.000 X 1.000 X 98.500	

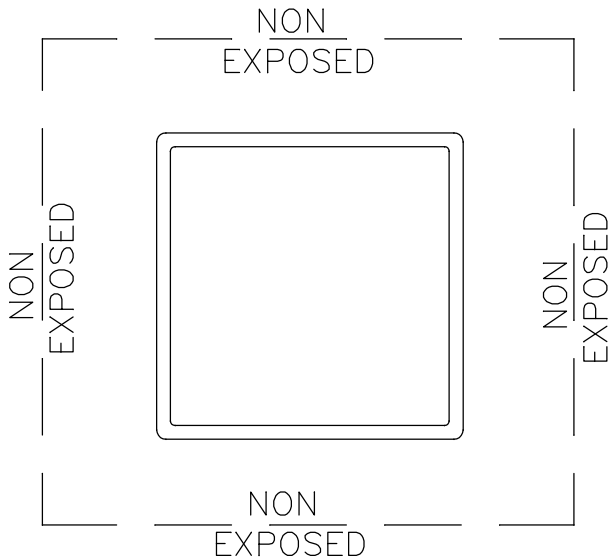

ACTUAL SIZE

- NOTE:
1. TYPICAL WALL THICKNESS = .045 ±.006
 2. MAX. ALLOWABLE TWIST .022”/FT
 3. AREA: 0.1713 SQ.IN.
 4. PERIMETER: 7.5627 IN.
 5. EST. WEIGHT/FT.: 0.2023#

NEWMAR CORP P.O. Box 30, Nappanee, IN. 46550 UNITS: INCHES TITLE BLOCK: 1TB	Model:	Sheet	Drawn by:	Checked by:	Revision: ADDED CUT TOLERANCE FOR PART #58681	By: B. S.
	SEE INDEX	1 OF 1	J. K.	J. K.		Date: 2/6/23
	Title:	I.D. # ENG_M	Date:	Date:	Revision:	By:
	ALUM,TUBE, 1.000 X 1.000 X 0.045	AT_SPEC\EXTRUSION\ALUM_TUBE_1.000X1.000X0.045	4/30/20	7/31/20		Date: