



VP4DBF-18C815AA Visteon CD6 Satellite Ready Product Information

Features:

- Visteon CD6 radio with Sirius Satellite radio reception
- Built in 6 disc changer
- Selective eject and load capabilities
- DSP tuner
- Scan/Seek/Shuffle/Repeat
- No magazine required
- Capable of displaying channel name, channel number, artist, and song title
- Ideal for the motorhome



Parts & Accessories

Description	Part Number
Harness – Standard	VHN001-01

Specifications:

- Power requirements – 12V DC
- 100 MM chassis
- 80 watts x 4 high power

This model is new for model year 2004

SIRIUS QUICK TIPS AND REFERENCE GUIDE



PARTS LIST FOR SYSTEM

VP4DBF-18C815-AA (radio)
VHN001-25 (or similar) (harness)


If not equipped with the following parts- then these are needed to complete the system.

18C961-BA-1YRSB (DLP MODULE)
VSRBKT-01 (BRACKET FOR DLP)
VHNDJS-01 (HARNESS FOR DLP)
73049 (SINGLE ARM SPLITTER)
73062 (SINGLE ARM ANTENNA)

GUIDELINES FOR ACTIVATION

1. First, push the “SAT” button at the lower left.
2. Look for a small circle to begin moving from right to left (this may only last briefly)
NOTE: If you see a message indicating “Service Sat” or “Call Sirius”- please refer to the section below for the mandatory reset procedures and troubleshooting help.
3. Next, push the “SEEK” button repeatedly and look for channel 184 appear. If you see 184 appear on the display, wait for at least 30-45 seconds to receive the audio from this “free preview” channel.
 - If this fails, begin at step 1 again and repeat.
 - By repeating these steps, you will be advancing the SAT preset “set” to the next set. (i.e. 1, 2, or 3) This is indicated by a tiny little number in the display.
4. Once the audio from channel 184 is obtained and coming in steady and reliably- then the Sirius ID number can be obtained by simultaneously pushing the SAT button and the #1 preset button. NOTE: This number can only be obtained while locked and receiving audio.
5. Lastly, call Sirius at (888) 539-7474 to activate the year of service included with this option.

RESET PROCEDURES FOR “SERVICE SAT” AND “CALL SIRIUS” MESSAGES

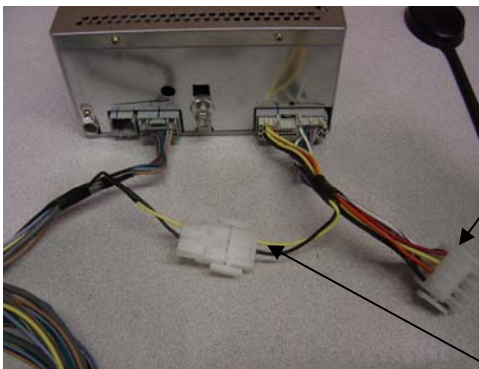

Try disconnecting power here first (10 seconds) and retest

Also try resetting power only to the DLP (10 seconds) and retest

- Resetting power at the 12 way AMP is a required step if any antenna connections have been removed, disconnected, or knocked loose at any time OR if any component is replaced or serviced.

- “SERVICE SAT” may indicate a connection problem, a defective splitter or antenna (or a damaged antenna line), or a possible DLP failure.

- “CALL SIRIUS” message may indicate a DLP or other failure- but the resets suggested should be attempted.

RiverPark Technical Support
(800) 442-7717

Please feel free to call in and discuss any problems and obtain a TSR for replacement.