

**USA**

SERVICE OFFICE  
Dometic, LLC  
2320 Industrial Parkway  
Elkhart, IN 46516  
574-294-2511

**CANADA**

Dometic, LLC  
46 Zatonski, Unit 3  
Brantford, ON N3T 5L8  
CANADA  
519-720-9578

For Service Center  
Assistance Call:  
800-544-4881

## 3313107.080 Kit, Drain Spout INSTALLATION INSTRUCTIONS

**⚠ WARNING**

This manual must be read and understood before installation, adjustment, service, or maintenance is performed. This unit must be installed by a qualified service technician. Modification of this product can be extremely hazardous and could result in personal injury or property damage.

**⚠ AVERTISSEMENT**

Lire et comprendre ce manuel avant de procéder à l'installation, à des réglages, de l'entretien ou des réparations. L'installation de cet appareil doit être effectuée par un réparateur qualifié. Toute modification de cet appareil peut être extrêmement dangereuse et entraîner des blessures ou dommages matériels.

# SERVICE INSTRUCTIONS

**DRAIN SPOUT KIT  
3313107.080**

## SAFETY INSTRUCTIONS

This manual has safety information and instructions to help users eliminate or reduce the risk of accidents and injuries.

### RECOGNIZE SAFETY INFORMATION



This is the safety alert symbol. It is used to alert you to personal injury hazards. Obey all safety messages that follow this symbol to avoid possible injury or death.

### UNDERSTAND SIGNAL WORDS

A signal word, when used with the safety alert symbol, will identify a safety hazard and its level of risk for personal injury. A signal word, without the safety alert symbol, will be used for property damage messages only.

**⚠ WARNING** WARNING indicates a hazardous situation which, if not avoided, could result in death or serious injury.

**⚠ CAUTION** CAUTION, used with the safety alert symbol, indicates a hazardous situation which, if not avoided, could result in minor or moderate injury.

**NOTICE** NOTICE is used to address practices not related to personal injury.

#### **⚠ WARNING**

**Read and follow all safety information and instructions to avoid personal injury.**

## GENERAL INSTRUCTIONS

#### **⚠ WARNING**

**These instructions must be read and understood before installation of this kit. This kit must be installed by a Dometic, LLC Service Center or a qualified service technician. Modification of this product can be extremely hazardous and could result in personal injury or property damage.**


Tools Required:

Phillips Screwdriver  
Silicone Sealant

This kit consists of:

- (A) Spout, Left Side (Shorter)
- (B) Spout, Right Side (Longer)
- (C) Compound, Sealer


**FIG. 1**

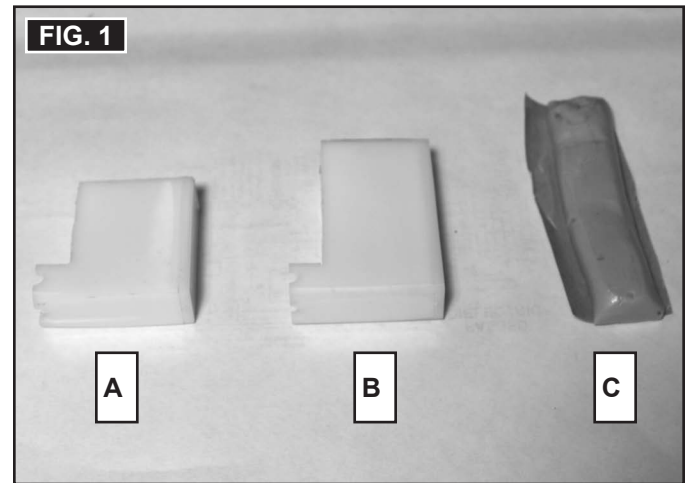

#### **⚠ WARNING**

**Shock hazard. Disconnect 120 VAC and 12 VDC power supply. Failure to obey this warning could cause death or severe personal injury.**


1. Remove outside plastic shroud. Locate right and left side condensate drain channels. For Instructional purposes the right side is the curb side when air conditioner is installed. See FIG. 2.
2. Remove any dirt or oil build up inside the drain channel and dry thoroughly.

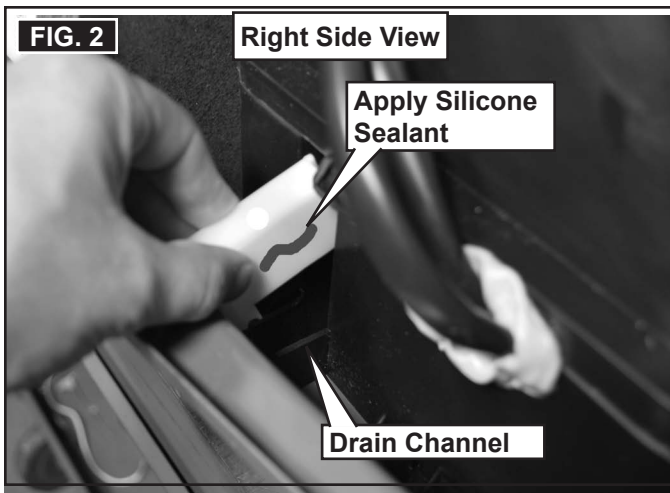


3. Apply a small amount of silicone sealant to each side of the right (longer of the two) spout. See FIG. 2.



4. Slide spout into position making sure the back edge is inside the drain hole. See FIG. 3.

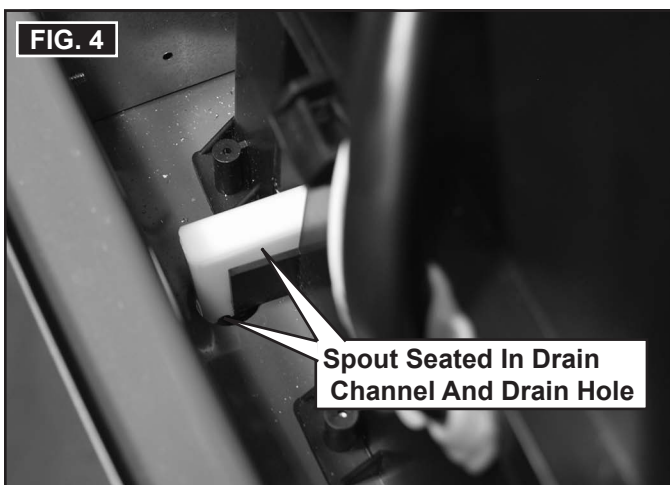

5. Seat spout into condensate drain channel and check to make sure the back edge of the spout is inside the drain hole. See FIG. 4.

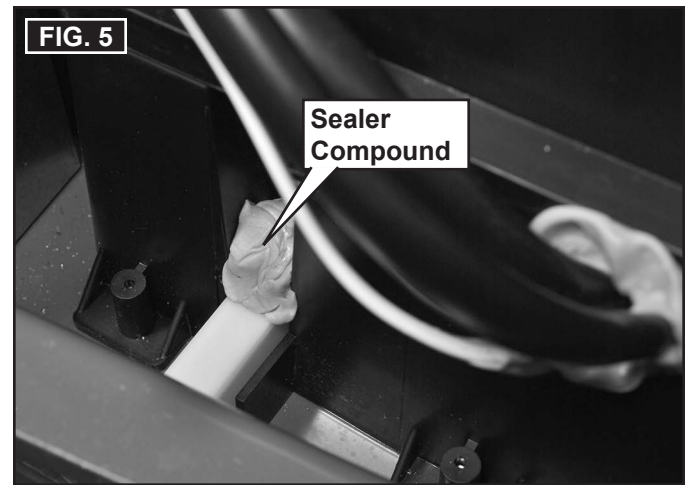

6. Once it is positioned properly apply one half of the sealer compound on top of the spout. This will hold it in position while the silicone sealant cures. See FIG. 5.
7. Repeat steps 3-6 for left side.
8. Reinstall outside plastic shroud.