


NOTES:

MAXIMUM DEVELOPED LENGTH - 70'  
1/2" BLACK MALL PIPE  
3/8" I.D. COPPER TYPE "L"  
PROPANE DISTRIBUTION SYSTEM COMPLIES WITH THE PARAMETERS SET BY TABLE 5-3-4 (NFPA 1192)  
ALL BRASS FITTINGS BELOW FLOOR TO BE FORGED--NOT MILLED  
MAXIMUM DEVELOPED LENGTH OF FLEX HOSE 72'

| MAX BTU VALUES |        |
|----------------|--------|
| FURNACE        | 40,000 |
| RANGE          | 25,100 |
| REFRIGERATOR   | 1,500  |
| WATER HEATER   | 12,000 |
| TOTAL BTU      | 78,600 |

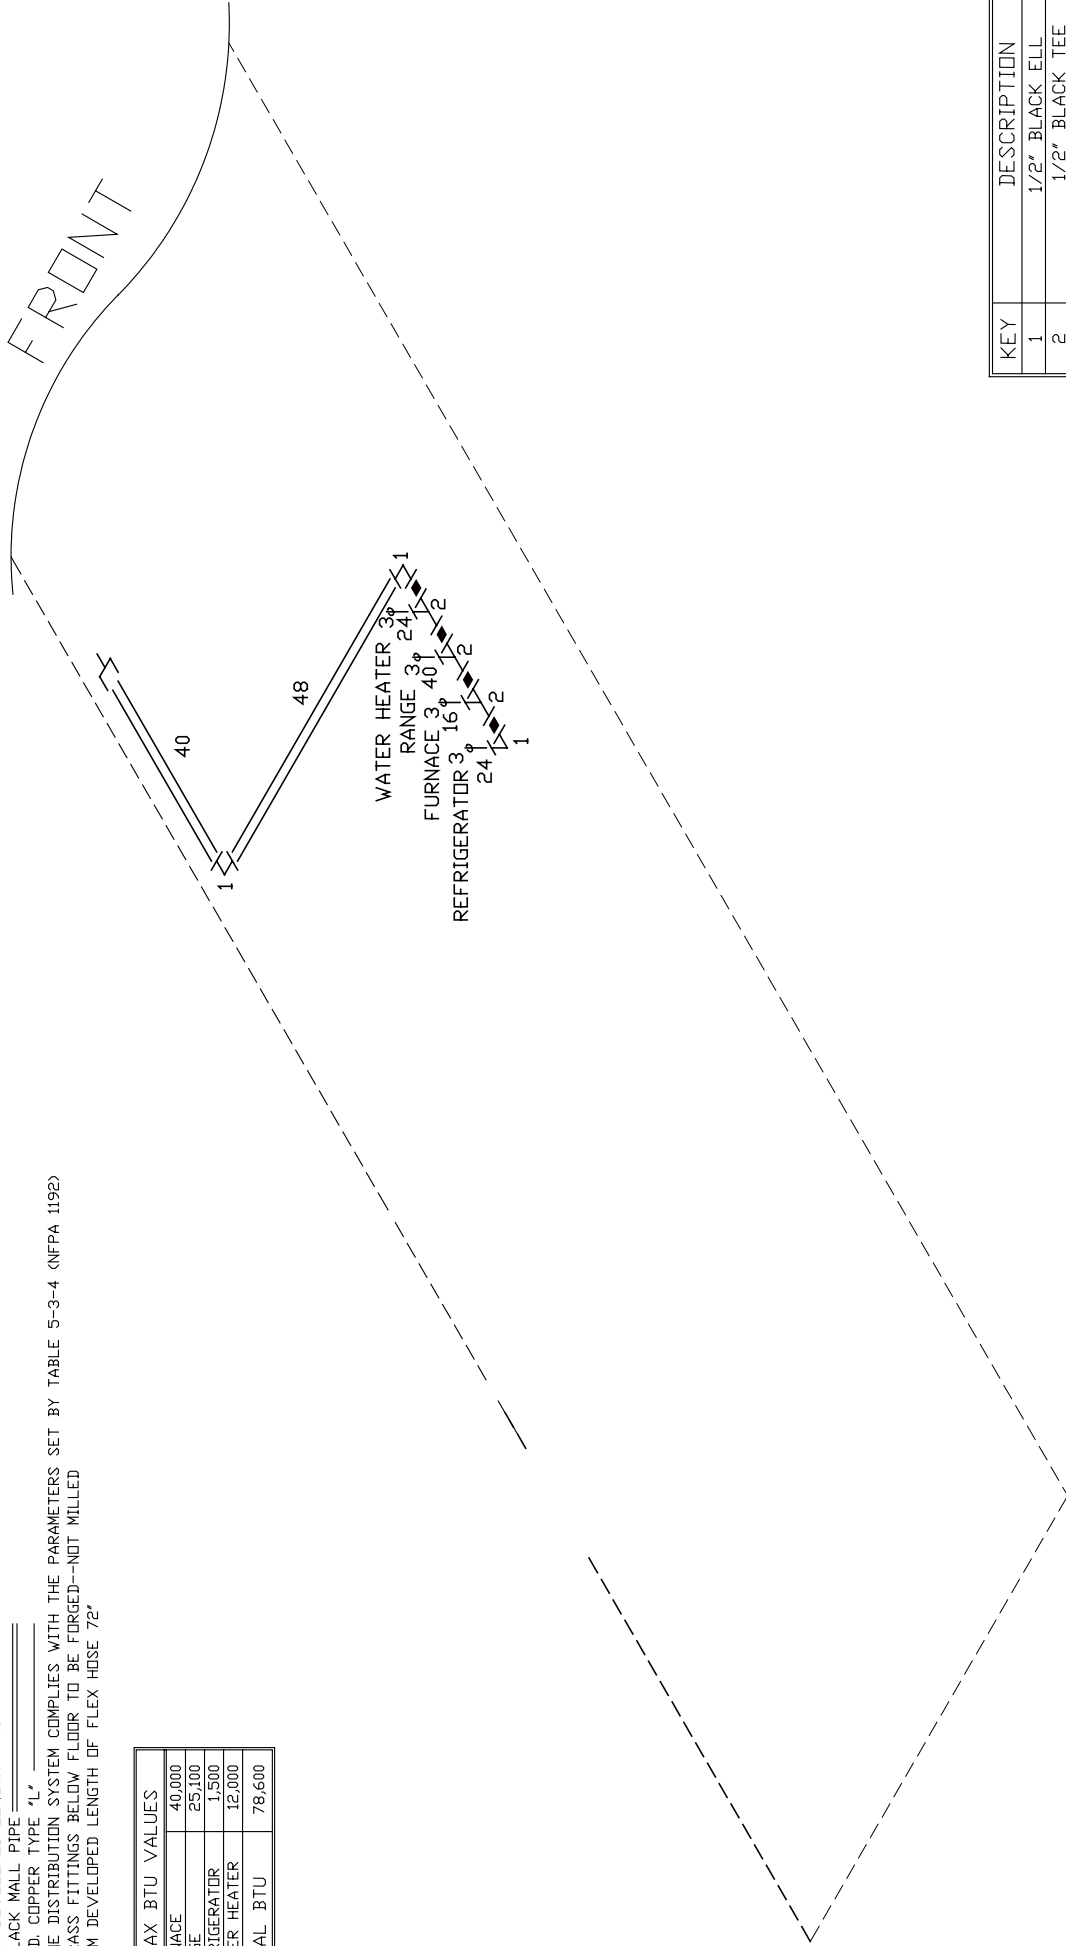

| KEY | DESCRIPTION                    |
|-----|--------------------------------|
| 1   | 1/2" BLACK ELL                 |
| 2   | 1/2" BLACK TEE                 |
| 3   | 1/2" FL x 3/8" MPT BRASS UNION |

|                                                    |                                      |                  |                    |                      |                                                                               |
|----------------------------------------------------|--------------------------------------|------------------|--------------------|----------------------|-------------------------------------------------------------------------------|
| NEWMAR CORP<br>P.O. Box 30,<br>Nappanee, IN. 46550 | Model:<br>CS CA 3510                 | Sheet<br>1 OF 3  | Drawn by:<br>C. L. | Checked by:<br>R. R. | Revision: BTU - RANGE 25,100 ILD 29,800 W/ TOTAL 78,600 ILD 83,300 (ECD #511) |
| Title:<br>PROPANE GAS                              | I.D. # 2009\<br>CA\CODE\PLUM\CS\3510 | Date:<br>10/5/07 | Date:<br>10/9/07   | By:<br>R. R.         | Date: 6/26/08                                                                 |
| Title block-PB_TB-M7_K3                            |                                      |                  |                    |                      |                                                                               |